

TKS-E50-9456

Chassis Kit for EPIC-9456


12

Turn-Key Chassis



Features

- Supports VGA/DVI/TV-out
- Supports 2.5" SATA Hard Disk Drive and CompactFlash™
- Supports 802.11b/g WiFi (Optional)
- Supports GPS (Optional)
- USB x 4, COM x 2 (Optional COM x 4)
- 8-bit Digital I/O (Optional)
- +12V Lockable DC Input
- Desktop or Wallmount (Optional)

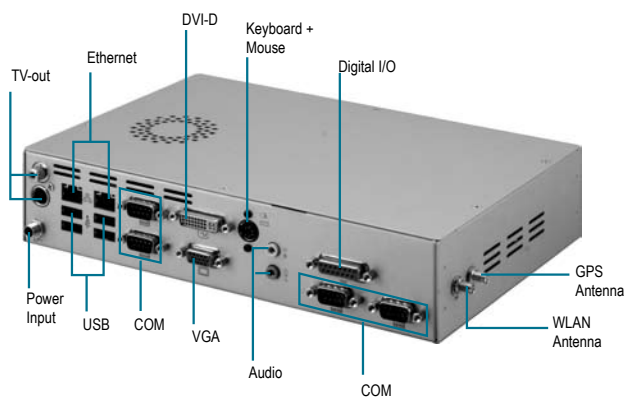


CE FCC

Specifications

System		
CPU Board Support	EPIC-9456	
Display	VGA	D-Sub 15 x 1
	DVI	DVI-D x 1
	TV-out	Composite & S-Video
Storage	SSD	Type II CompactFlash™ Slot x 1
	Hard Disk	2.5" SATA Hard Disk Drive Bay x 1
LAN	Ethernet	10/100/1000Base-TX, RJ-45 x 2
	Wireless	802.11b/g WiFi Kit (optional)
System I/O	PS/2 Port	PS/2 x 1 for keyboard and mouse through Y-cable
	Serial Port	RS-232 x 1, RS-232/422/485 x 1 (optional COM x 4)
	USB Port	USB 2.0 x 4
	Digital I/O	8-bit programmable (optional)
	Audio	Line out, MIC
GPS	GPS kit with antenna (optional)	
LED Indicator	Power LED x 1, HDD LED x 1	
Power Supply	AT or ATX type, +12V DC Input	
System Cooling	One CPU fan and one system fan	
Mechanical & Environmental		
Operating Temperature	32°F ~ 104°F (0°C to 40°C)	
Vibration	0.5g rms/ 5~500Hz/ random operation	
EMC	CE / FCC Class A	
Dimension	10" (W) x 6.3" (D) x 2.2" (H) (255mm x 160mm x 56mm)	
Construction	Heavy duty steel	
Mounting	Desktop or Wallmount (optional)	
Color	Gray	

TKS-E50-9456

Dimension Unit: mm

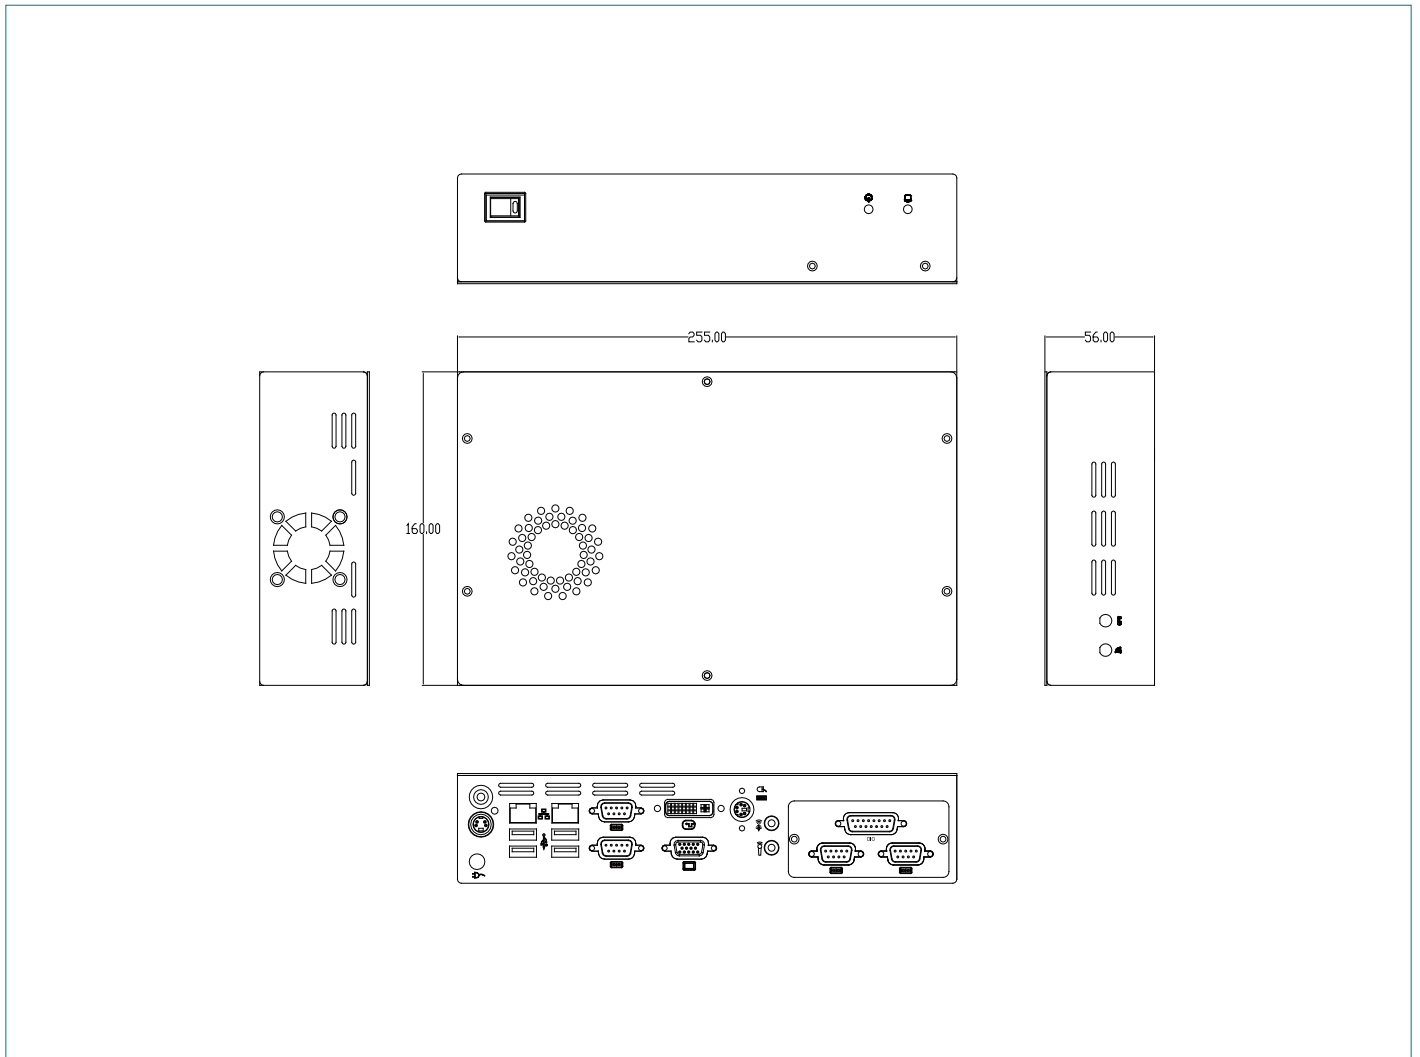

Ordering Information

- **TF-TKS-E50-9456-001-DX/DT**
Chassis Kit, EPIC-9456-A10 (DX: DC-ATX / DT: DC-AT)
- **9741E50001**
COM Kit for TKS-E50
- **9741666648**
GPS LAN Kit, IEEE 802.11 b/g
- **9741666647**
Wireless LAN Kit, IEEE 802.11b/g